

# APD 1425 M

Mitsubishi

D+ & T



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$



2000/14/EC

& \$\$\$ # ( #

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	1425,00	1140,00	1290,00	1032,00	1862,00

fP GDE

GC, ) &

, ) & z

fDF DE

%\$!

% % &

GC " \$ (\*\*

z & (

GC

## Standard Specifications

z

fl

E

z

TRANSFER SWITCH

# APD 1425 M

Mitsubishi


D+' &'

Manufacturer		Mitsubishi
Model		S12R-PTA
		% \$\$' "# "
		%&\$Z\$ '\$ "
		0% ' ) Z\$ \$< DQ
	L	49,000
	"	170X180
		14:1
	fl # ı	"# " 1500
	fl ı	L 180,00
		L 335,00
AbsorbedAirDischargeReSourceKey.Text	' # "	98,00
	' # "	1800,00
		24 V d.c.
	Load	%\$ \$ı
	# "	
		260,60

		ECO43-2LN/4
	Hz	50
	"	1300,00
7 cg'		0,80
		3
	fl ı	400/230

		fl ı		fl ı	
	"	"	"	"	L
APD 1425 M	9500,00	4400,00	2100,00	2200,00	2000,00
		fl ı		fl ı	
	"	"	"	"	L
AK 96.	13170	7500	2300	2500+1300	1900

D+' &'

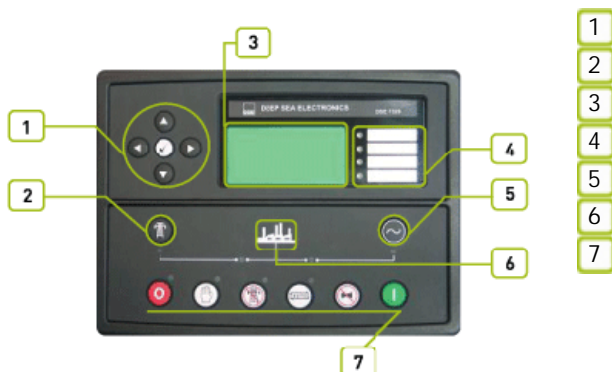

# APD 1425 M

Mitsubishi

D+' &'

- 1 8G9ž ' + ' &\$ž ) 5ž&&\$#&(\$
- 2
- 3
- 4 8G9'+' &\$ ž fi &&\$ ž "8G9'+' &\$ 8G9'+' &\$ ž % &I '\* ( žFG&' &žFG(, ) ž ž

# APD 1425 M

Mitsubishi

D+&''

f@z@Bl  
f@!@!@t

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B '\*\$-\$)'\$

6G'9B '\*%\$\$\$!\*!&

6G'9B '\*%\$\$\$!\*!(

f&)(, t

f&%) +t

f&% \$t

GA 8

!&+""

"% , !&\*(

)  
&(\$)

ž

ž

ž

ž

"


"

"

# APD 1425 M

Mitsubishi

D+' &'

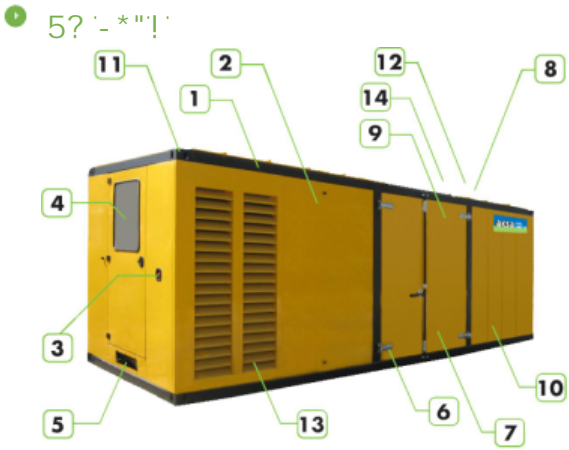

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cable out locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2300
fl "L	"	7500
fl "L	"	2500+1300
	L	1900