

APD 2100 M

Mitsubishi

D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

& \$\$\$ # (#

z) \$ z' z' D:

| | " | " | " | " | Amp |
|---------|---------|---------|---------|---------|---------|
| 400/230 | 2100,00 | 1680,00 | 1875,00 | 1500,00 | 2709,00 |

fP GDE

GC,) &

,) & z

fDF DE

%\$!

% %&

GC" \$(*"

z&(

GC

Standard Specifications

z

fl

!

E

z

TRANSFER SWITCH

APD 2100 M

Mitsubishi

D+' &'

| | | |
|--------------------------------------|--------|------------------|
| Manufacturer | | Mitsubishi |
| Model | | S16R-PTA2 |
| | | % \$\$\$' "# " |
| | | %+- \$\$\$' " |
| | | Ø' -- \$\$\$< DQ |
| | L | 65,370 |
| | " | 170x180 |
| | | 13,5:1 |
| | fl # ı | "# " 1500 |
| | fl ı | L 230,00 |
| | | L 445,00 |
| AbsorbedAirDischargeReSourceKey.Text | ' # " | 143,00 |
| | ' # " | 2040,00 |
| | ° C | 379,00 |
| | | 24 V d.c. |
| | Load | %%\$ı |
| | # " | |
| | | 406,10 |

| | | |
|------|------|------------|
| | | ECO46-1L/4 |
| | Hz | 50 |
| | " | 2100,00 |
| 7cg' | | 0,80 |
| | | 3 |
| | fl ı | 400/230 |

| | | | | | |
|------------|----------|---------|---------|-----------|---------|
| | | fl ı | | fl ı | |
| | " | " | " | " | L |
| APD 2100 M | 14850,00 | 5200,00 | 2500,00 | 2900,00 | 2000,00 |
| | | fl ı | | fl ı | |
| | " | " | " | " | L |
| AK 99 | 20100 | 9000 | 2800 | 3300/4800 | 2200 |


D+' &'



APD 2100 M

Mitsubishi

D+' &'

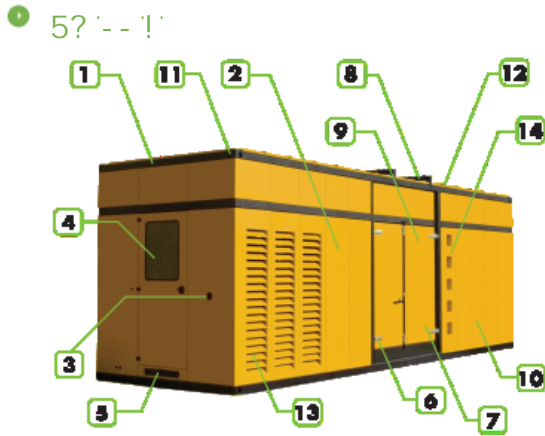

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set
- 5 generator set
- 6 Cables out locations are back of the canopy.
- 7 Corrosion-resistant locks and hinges.
- 8 oil could be drained via valve and a hose
- 9 Exhaust system on the canopy.
- 10 special large access doors for easy maintenance
- 11 the cap on the canopy provides easy access to radiator cap.
- 12 Lifting points similar to ISO container , located on each top corner of the canopy.
- 13 the canopy.
- 14 sound proofing materials

| | | |
|-------|---|-----------|
| | " | 2800 |
| fl "L | " | 9000 |
| fl "L | " | 3300/4800 |
| | L | 2200 |