

AD 275

Doosan
Mecc Alte
D+ &



ISO8528	GC,) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC & \$\$\$#(#
z) \$ z' z' D:

	"	"	"	"	Amp
400/230	275,00	220,00	250,00	200,00	360,00

fP GDE GC,) &
fDF DE % \$! % % & GC " \$ (* z & GC

Standard Specifications

z
fl ! E
z
z

ALTERNATOR

D: A Z 5J F
fl " E
fP \$\$\$ \$\$\$ E

TRANSFER SWITCH

fl " E

AD 275

Doosan
Mecc Alte
D+' &'

Manufacturer		Doosan		
Model		P126TI		
		%\$\$' "# "		
		&+&\$\$' "		
		0*(&\$\$<DQ		
	L	11,050		
	"	123 x 155		
		17,0:1		
	fl # ı	"# "	1500	
	fl ı	L	23,00	
		L	65,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	16,40		
	' # "	295,00		
fl ' # ı	' # "	43,00		
	° C	560,00		
		24 V d.c.		
	Load	%\$\$ı	ı))\$ı
	# "			
		53,30	40,00	27,50


		Mecc Alte		
		ECO 38-1LN		
	Hz	50		
	"	250,00		
7cg'		0,80		
		3		
	ı	400/230		
	A	360,00		
Temperature		H		

		ı	ı	ı	
	"	"	"	"	L
AD 275	2265,00	2950,00	1300,00	1588,00	450,00
		ı	ı	ı	
	"	"	"	"	L
MS 60	2940	4000	1300	1970	450

AD 275

Doosan
Mecc Alte
D+' &'

1 D+' &'

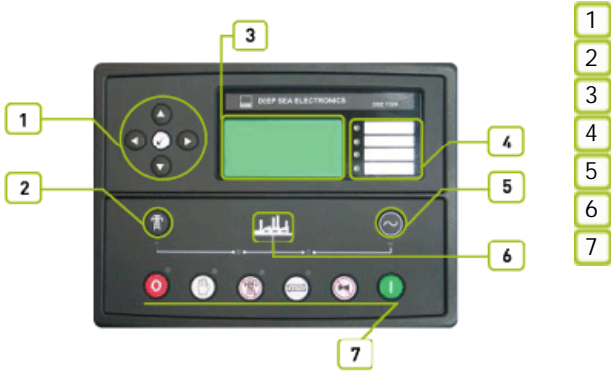

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž
&&\$ž ž

8G9+' &\$ž

8G9+' &\$ž

% &1 * (

žFG' &žFG(,) ž

"Новая энергия"

AD 275

Doosan
Mecc Alte
D+ &

f@#@Bt
f@#@Bt

"z" "z"

f@#@Bt

971

f&%) +L

f&)(, t

f&%) \$L

z

"% !&*(

&(\$)

z

z

GA 8


!&+""

z

"Новая энергия"

AD 275

Doosan
Mecc Alte
D+ & "

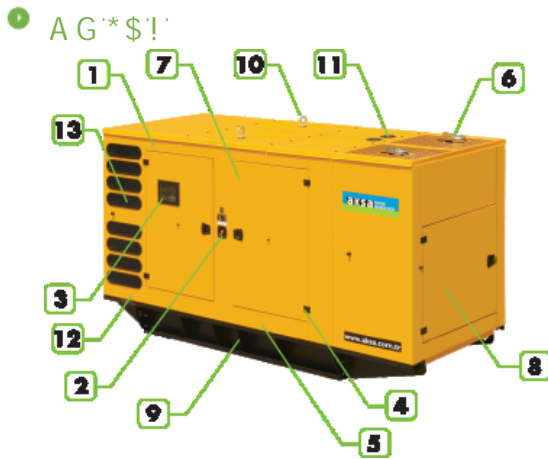

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

ООО "Новая энергия"

	"	1300
fl "L	"	4000
fl "L	"	1970
	L	450