


# AD 330

Doosan  
Mecc Alte  
D+ &



<b>ISO8528</b>	GC, ) &
<b>SZUTEST</b>	GC - \$\$\$%
<b>CE</b>	

**2000/14/EC**  
 &\$\$\$#( #  
 z) \$ z'z' D:

	"	kw	"	kw	Amp
400/230	330,00	264,00	300,00	240,00	433,00

fP GDE GC, ) &  
 fDF DE %s1 % %& GC " \$(\*\* z&( GC

**Standard Specifications**  
 z  
 fl ! E  
 z  
 z

fl t  
 fl " t  
 fP \$\$\$ \$\$\$ t

**ALTERNATOR**

D: A Z 5J F  
 fl " t  
 fP \$\$\$ \$\$\$ t

**TRANSFER SWITCH**

fl

# AD 330

Doosan  
Mecc Alte  
D+' &''

Manufacturer		Doosan		
Model		P126TI-II		
		% \$ \$	"# "	
		294,00 kw [394,00HP]		
	L	11,050		
	"	123 x 155		
		17,0:1		
	fl # ı	"# "	1500	
	fl ı	L	23,00	
		L	65,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	20,10		
	' # "	295,00		
fl ' # ı	' # "	47,40		
	° C	590,00		
		24 V d.c.		
	Load	% \$ \$ı	ı % )	) \$ı
	# "			
		63,10	47,00	31,30


		Mecc Alte		
		ECO 38-2LN/4		
	Hz	50		
	"	300,00		
7cg'		0,80		
		3		
	ı ı	400/230		
	A	433,00		
Temperature		H		

		ı ı		ı ı	
	"	"	"	"	L
AD 330	2375,00	2950,00	1300,00	1588,00	450,00
		ı ı		ı ı	
	"	"	"	"	L
MS 60	3065	3960	1356	2097	470

# AD 330

Doosan  
Mecc Alte  
D+' &'

## 1 D+' &'

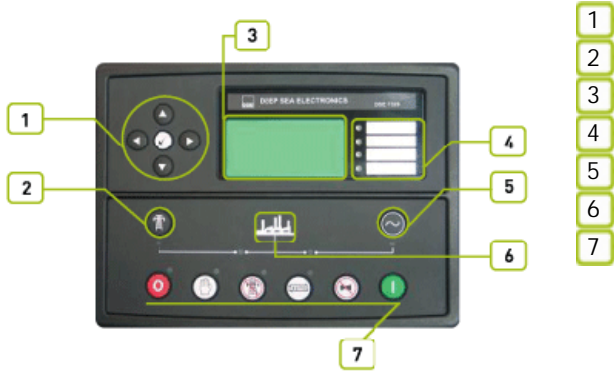

## 2

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

8G9+' &\$ž &&\$ž žž

8G9+' &\$ž 8G9+' &\$ž

žž

% &1 \* (

žFG' &žFG(, ) ž

"Новая энергия"

# AD 330

Doosan  
Mecc Alte  
D+ &

f@#@Bt  
f@#@Bt

"z" "z"

f@#@Bt

971

f&%) +t

f&)(, t

f&% \$t

ž

"% !&\*(

&(\$)

ž

ž

GA 8


!&+""

ž

"Новая энергия"

# AD 330

Doosan  
Mecc Alte  
D+ &

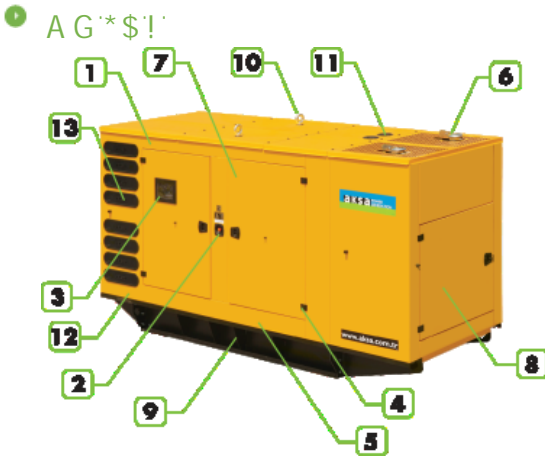

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

ООО "Новая энергия"

	"	1356
fl "L	"	3960
fl "L	"	2097
	L	470