

# AD 410

Doosan  
Mecc Alte  
D+ &



ISO8528

GC ; ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	410,00	328,00	375,00	300,00	541,00

fP GDE

GC ; ) &

) & z

fDF DE

%\$1

% %&

GC " \$(\*\*

z&(

GC

## Standard Specifications

z

fl

E

z

z

## ALTERNATOR

D; A Z' 5JF

## TRANSFER SWITCH

# AD 410

Doosan  
Mecc Alte  
D+' &'

Manufacturer		Doosan		
Model		P158LE-1		
		%\$\$' "# "		
		' * &\$\$' "		
		Q, ) \$\$\$< DQ		
	L	14,600		
	"	128 x 142		
		15,0:1		
	fl # ı	"# "	1500	
	fl ı	L	21,00	
		L	88,50	
AbsorbedAirDischargeReSourceKey.Text	' # "	23,50		
	' # "	410,00		
fl ' # ı	' # "	59,50		
	° C	520,00		
		24 V d.c.		
	Load	%\$\$ı	ı)	)\$ı
	# "	78,70	58,70	40,00


		Mecc Alte		
		ECO 40-1S/4		
	Hz	50		
	"	400,00		
7cg'		0,80		
		3		
	ı	400/230		
	A	577,00		
Temperature		H		

		ı	ı	ı	
	"	"	"	"	L
AD 410	3030,00	2965,00	1550,00	1994,00	700,00
		ı	ı	ı	
	"	"	"	"	L
MS 70	4024	4400	1560	2360	700

# AD 410

Doosan  
Mecc Alte  
D+' &'

## 1 D+' &'

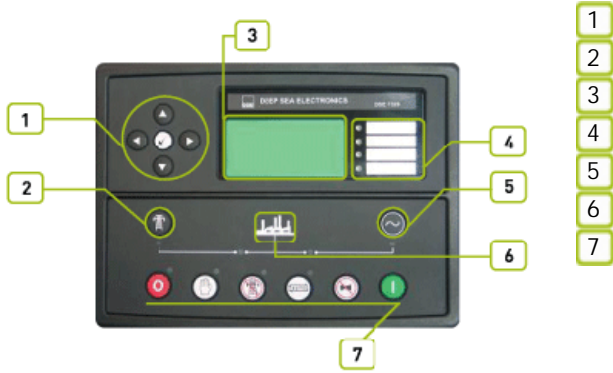

## 2

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

8G9+' &\$ž &&\$' žž 8G9+' &\$ž 8G9+' &\$ž

% &1 \* ( žFG' &žFG(, ) ž

«Новая энергия»

# AD 410

Doosan  
Mecc Alte  
D+ &

f@#@Bt  
f@#@Bt

"z" "z"

f@#@Bt

971

f&%) +L

f&)(, t

f&% \$L

ž

"% !&\*(

&(\$)

ž

ž

GA 8


!&+""

ž

"Новая энергия"

# AD 410

Doosan  
Mecc Alte  
D+ &

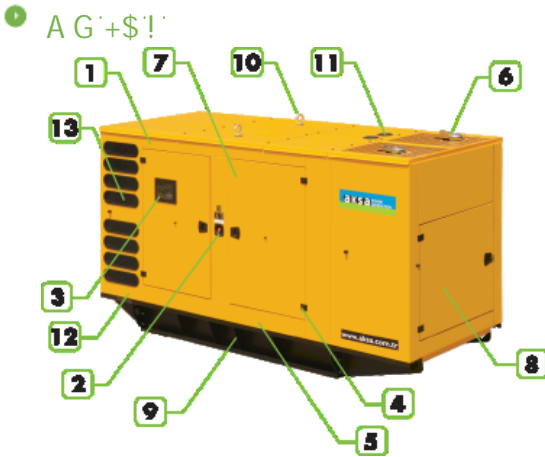

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

ООО "Новая энергия"

	"	1560
fl "L	"	4400
fl "L	"	2360
	L	700