

# AD 490

Doosan  
Mecc Alte  
D+ &



ISO8528

GC , ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	485,00	388,00	425,00	340,00	613,00

fP GDE

GC , ) &

, ) & z

fDF DE

%\$!

% %&

GC " \$(\*\*

z&(

GC

## Standard Specifications

z

fl

E

z

z

## ALTERNATOR

D; A Z 5J F

## TRANSFER SWITCH

# AD 490

Doosan  
Mecc Alte  
D+' &'

Manufacturer		Doosan		
Model		P158LE		
		%\$\$' "# "		
		(%\$\$' "		
		Q))\$\$<DQ		
	L	14,600		
	"	128 x 142		
		15,0:1		
	fl # ı	"# "	1500	
	fl ı	L	21,00	
		L	88,50	
AbsorbedAirDischargeReSourceKey.Text	' # "	25,50		
	' # "	410,00		
fl ' # ı	' # "	78,30		
	° C	580,00		
		24 V d.c.		
	Load	%\$\$ı	ı)	)\$ı
	# "	89,30	65,00	43,90


		Mecc Alte		
		ECO 40-2S/4		
	Hz	50		
	"	450,00		
7cg'		0,80		
		3		
	ı	400/230		
	A	649,00		
Temperature		H		

		ı	ı	ı	
	"	"	"	"	L
AD 490	3130,00	3026,00	1550,00	1994,00	700,00
		ı	ı	ı	
	"	"	"	"	L
MS 70	4150	4400	1560	2360	700

# AD 490

Doosan  
Mecc Alte  
D+' &'

## 1 D+' &'

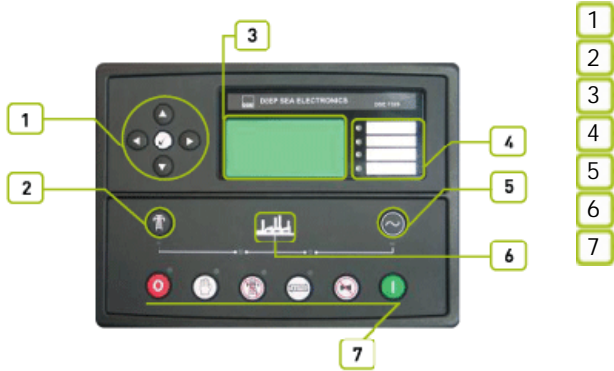

## 2

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

8G9+' &\$ž &&\$ž žž  
8G9+' &\$ž 8G9+' &\$ž  
žž  
% &1\*(  
žFG' &žFG(,) ž

"Новая энергия"

# AD 490

Doosan  
Mecc Alte  
D+ &

f@#@Bt  
f@#@Bt

"z" "z"

f@#@Bt

971

f&%) +t

f&)(, t

f&%) \$t

z

"% !&\*(

&(\$)

z

z

GA 8


!&+""

z

"Новая энергия"

# AD 490

Doosan  
Mecc Alte  
D+ &

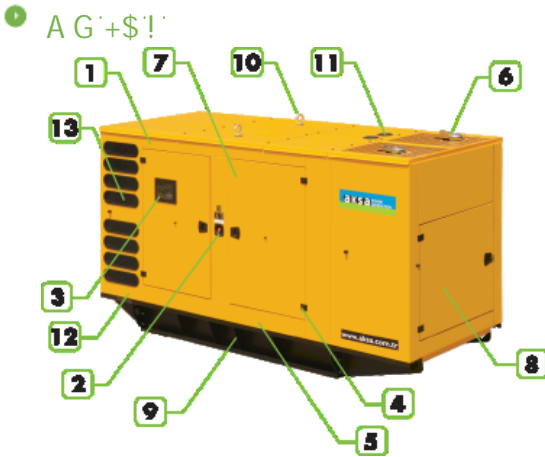

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

"Новая энергия"

	"	1560
fl "L	"	4400
fl "L	"	2360
	L	700