

AD 510

Doosan
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	510,00	408,00	460,00	368,00	664,00

fPQDE

GC,) &

,) & z

fDF DE

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D; A Z' 5J F

TRANSFER SWITCH

AD 510

Doosan
Mecc Alte
D+' &''

Manufacturer		Doosan		
Model		DP158LC		
		%\$\$' "# "		
		449,00 kw [602,00HP]		
	L	14,618		
	"	128 x 142		
		15,0:1		
	fl # ı	"# "	1500	
	fl ı	L	22,00	
		L	90,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	33,10		
	' # "	550,00		
	' # "	88,00		
	° C	529,00		
		24 V d.c.		
	Load	%\$\$ı	ıııı) \$ı
	# "	99,60	72,90	48,90


		Mecc Alte		
		ECO 40-3S/4		
	Hz	50		
	"	500,00		
7cg'		0,80		
		3		
	ıııı	400/230		
	A	721,70		

		ıııı		ıııı	
		"	"	"	L
AD 510	3150,00	3106,00	1550,00	1994,00	700,00
		ıııı		ıııı	
		"	"	"	L
MS 70	4100	4460	1606	2477	700

AD 510

Doosan
Mecc Alte
D+' &'

1 D+' &'

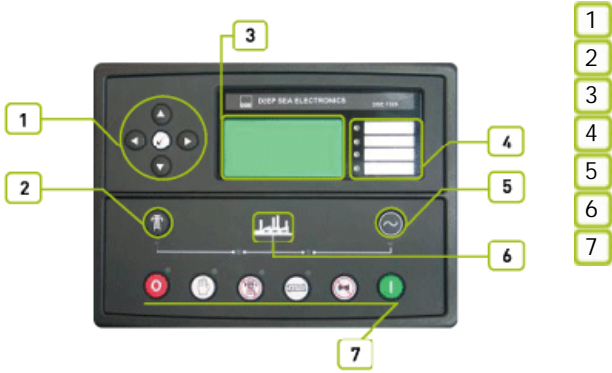

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' žž 8G9+' &\$ž 8G9+' &\$ž

% &1*(žFG' &žFG(,) ž

"Новая энергия"

AD 510

Doosan
Mecc Alte
D+ &

f@#@Bt
f@#@Bt

"z" "z"

f@#@Bt

971

f&%) +L

f&)(, t

f&% \$L

ž

"% !&*(

&(\$)

ž

ž

GA 8

!&+""

ž

6G'9B *\$-\$) \$


6G'9B *%\$\$\$!*!&

6G'9B *%\$\$\$!*!(

"Новая энергия"

AD 510

Doosan
Mecc Alte
D+ &

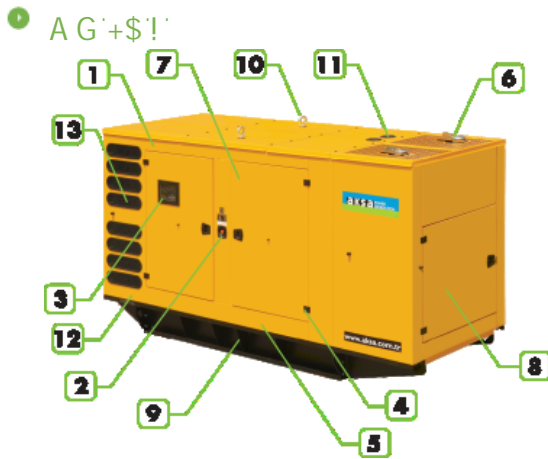

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

ООО "Новая энергия"

	"	1606
fl "л	"	4460
fl "л	"	2477
	L	700