

AD 550

Doosan
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	550,00	440,00	500,00	400,00	722,00

fPQDE

GC,) &

,) & z

fDF DE

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D: A Z 5J F

TRANSFER SWITCH

AD 550

Doosan
Mecc Alte
D+' &''

Manufacturer		Doosan		
Model		P180LE		
		%\$\$' "# "		
		494,00 kw [662,50HP]		
	L	18,300		
	"	128 x 142		
		15,0:1		
	fl # ı	"# "	1500	
	fl ı	L	35,00	
		L	91,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	33,70		
	' # "	565,00		
	' # "	97,90		
	° C	580,00		
		24 V d.c.		
	Load	%\$\$ı	ıııı) \$ı
	# "	111,60	81,00	54,80


		Mecc Alte
		ECO 40-3S/4
	Hz	50
	"	500,00
7 cg'		0,80
		3
	ıı ı	400/230
	A	722,00
Temperature		H

		ıı ı		ıı ı	
	"	"	"	"	L
AD 550	3600,00	3264,00	1550,00	1991,00	850,00
		ıı ı		ıı ı	
	"	"	"	"	L
MS 80	4790	4810	1606	2615	850

AD 550

Doosan
Mecc Alte
D+' &'

1 D+' &'

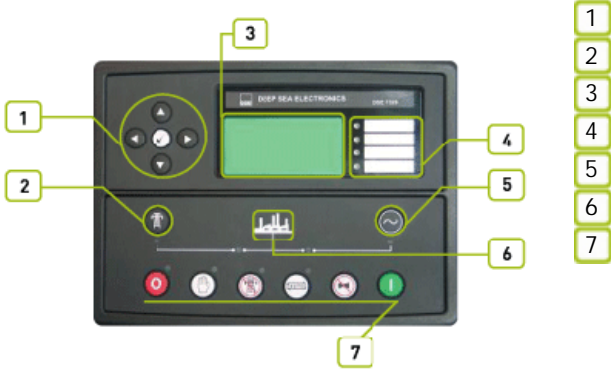

2

"8G9ž + ' &\$ž) 5ž&&\$#(\$

3

4

5

'8G9+' &\$' &&\$' ž' '8G9+' &\$' '8G9+' &\$' fl

% &1 *(' žFG' &žFG(,) ž

"Новая энергия"

AD 550

Doosan
Mecc Alte
D+ &

f@#@Bt
f@#@Bt

"z" "z"

f@#@Bt

971

f&%) +L

f&)(, t

f&%) \$L

ž

"% !&*(

&(\$)

ž

ž

GA 8

!&+""

ž

6G'9B *\$-\$)

6G'9B *%\$\$\$!*&

6G'9B *%\$\$\$!*(&

"Новая энергия"

AD 550

Doosan
Mecc Alte
D+ &



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

ООО "Новая энергия"

	"	1606
fl "L	"	4810
fl "L	"	2615
	L	850