

AD 710

Doosan
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	710,00	568,00	640,00	512,00	923,80

fP GDE

GC,) &

,) & z

fDF DE

%\$1

% %&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D; A Z' 5J F

TRANSFER SWITCH

AD 710

Doosan
Mecc Alte
D+' &''

Manufacturer		Doosan		
Model		DP180LB		
		%\$\$' "# "		
		612,00 kw [820,00HP]		
	L	18,273		
	"	128 x 142		
		15,0:1		
	fl # ı	"# "	1500	
	fl ı	L	34,00	
		L	112,20	
AbsorbedAirDischargeReSourceKey.Text	' # "	' # "	36,00	
		' # "	700,00	
		' # "	118,00	
	° C		587,00	
			24 V d.c.	
	Load	%\$\$ı	ııı) \$ı
	# "			
		136,40	103,80	71,20


		Mecc Alte		
		ECO40 2L/4		
	Hz	50		
	"	680,00		
7cg'		0,80		
		3		
	ııı	400/230		
	A	981,50		

		ııı ı		ııı ı	
		"	"	"	L
AD 710	4000,00	3359,00	1550,00	2056,00	850,00
		ııı ı		ııı ı	
		"	"	"	L
MS 80	4940	4810	1606	2615	850

AD 710

Doosan
Mecc Alte
D+' &'

1 D+' &'

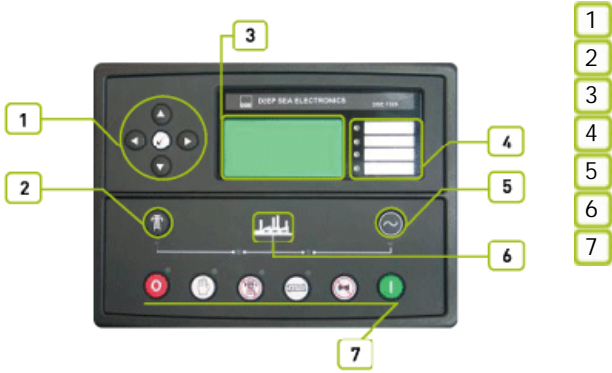

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$ž žž

8G9+' &\$ž 8G9+' &\$ž

žž

% &1*(

žFG' &žFG(,) ž

"Новая энергия"

AD 710

Doosan
Mecc Alte
D+ &

f@#@Bt
f@#@Bt

"z" "z"

f@#@Bt

971

f&%) +L

f&)(, t

f&%) \$L

ž

"% !&*(

&(\$)

ž

ž

GA 8

!&+""

ž

"Новая энергия"

AD 710

Doosan
Mecc Alte
D+ &



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

"Новая энергия"

	"	1606
fl "L	"	4810
fl "L	"	2615
	L	850