


# AD 750

Doosan  
Mecc Alte  
D+ &



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	750,00	600,00	680,00	544,00	982,00

fPGE

GC, ) &

,) & z

fDF DE

%\$1

% %&

GC" \$(\*\*

z&(

GC

## Standard Specifications

z

fl

E

z

z

## ALTERNATOR

D: A Z'5JF

## TRANSFER SWITCH

# AD 750

Doosan  
Mecc Alte  
D+' &''

Manufacturer	Doosan		
Model	DP222LB		
	% \$ \$	"# "	
		664,00 kw [890,00HP]	
	L	21,927	
	"	128 x 142	
		15,0:1	
	fl # ı	"# "	1500
	fl ı	L	40,00
		L	134,80
AbsorbedAirDischargeReSourceKey.Text	' # "	42,20	
	' # "	860,00	
fl ' # ı	' # "	101,00	
	° C	481,00	
		24 V d.c.	
	Load	% \$ \$ı	) \$ı
	# "	147,10	109 20 73,00


	Mecc Alte
	ECO 40-2L/4
	Hz
	50
	"
	680,00
7cg'	0,80
	3
	fl ı
	400/230
	A
	982,00

		fl ı		fl ı	
		"	"	"	L
AD 750	4190,00	3494,00	1550,00	2301,00	1000,00
		fl ı		fl ı	
		"	"	"	L
MS 85	5400	5297	1606	2656	1000

# AD 750

Doosan  
Mecc Alte  
D+' &'

## 1 D+' &'

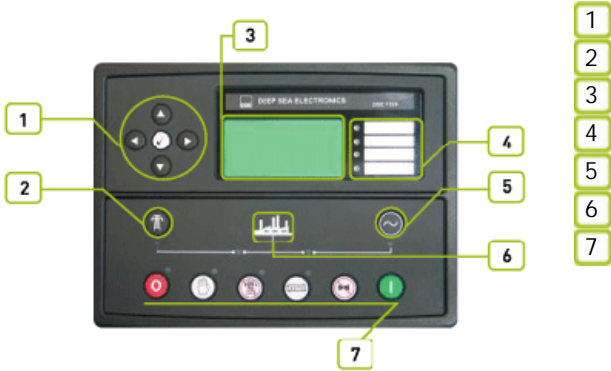

## 2

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

8G9+' &\$ž &&\$ž žž  
8G9+' &\$ž 8G9+' &\$ž  
žž  
% &1\*(  
žFG' &žFG(,) ž

"Новая энергия"

# AD 750

Doosan  
Mecc Alte  
D+ &

f@#@Bt  
f@#@Bt

"z" "z"

f@#@Bt

971

f&%) +t

f&)(, t

f&% \$t

ž

"% !&\*(

&(\$)

ž

ž

GA 8


!&+""

ž

"Новая энергия"

# AD 750

Doosan  
Mecc Alte  
D+ &

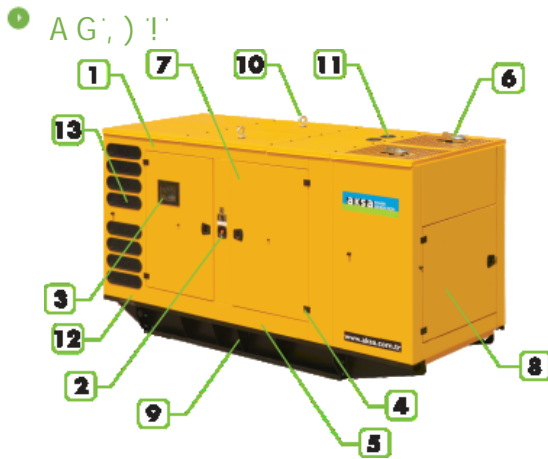

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

ООО "Новая Энергия"

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000