


AD 825

Doosan
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	825,00	660,00	750,00	600,00	1083,00

fPGE

GC,) &

,) & z

fDF DE

%\$1

% %&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D; A Z'5JF

TRANSFER SWITCH

AD 825

Doosan
Mecc Alte
D+' &'

Manufacturer		Doosan		
Model		DP222LC		
		%\$\$' "# "		
		+&' \$\$\$' "		
		G* - \$\$\$<DQ		
	L	21,927		
	"	128 x 142		
		15,0:1		
	fl # 7	"# "	1500	
	fl 7	L	40,00	
		L	134,80	
AbsorbedAirDischargeReSourceKey.Text	' # "	' # "	45,00	
		' # "	860,00	
		' # "	108,00	
	° C		502,00	
			24 V d.c.	
	Load	%\$\$i	%))\$i
	# "			
		161,00	119,10	79,30


		Mecc Alte		
		ECO 40-VL/4		
	Hz	50		
	"	750,00		
7cg'		0,80		
		3		
	fl 7	400/230		
	A	1083,00		

		fl 7		fl 7	
		"	"	"	L
AD 825		3630,00	1550,00	2301,00	1000,00
		fl 7		fl 7	
		"	"	"	L
MS 85	5535	5297	1606	2656	1000

AD 825

Doosan
Mecc Alte
D+' &'

1 D+' &'

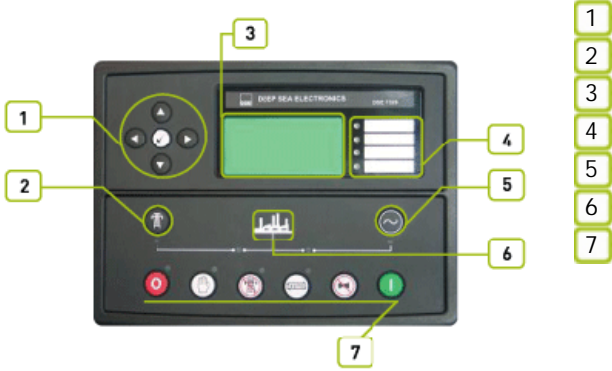

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž
&&\$ž ž

8G9+' &\$ž

8G9+' &\$ž

% &1 * (' žFG' &žFG(,) ž

"Новая энергия"

AD 825

Doosan
Mecc Alte
D+ &

f@#@Bt
f@#@Bt

"z" "z"

f@#@Bt

971

f&%) +t

f&)(, t

f&% \$t

ž

"% !&*(

&(\$)

ž

ž

GA 8


!&+""

ž

"Новая энергия"

AD 825

Doosan
Mecc Alte
D+ &

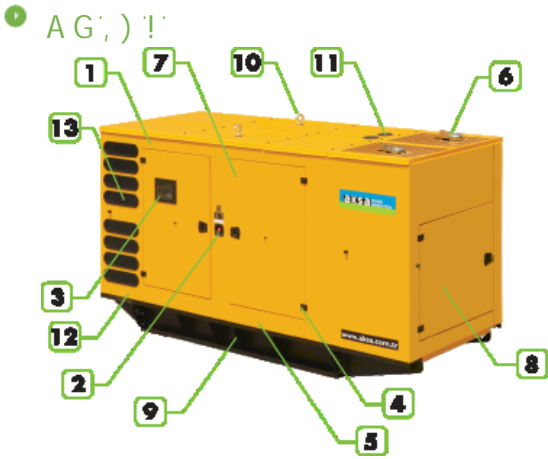

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

"Новая энергия"

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000