

# APD 825 M

Mitsubishi

D+ &



<b>ISO8528</b>	GC ; ) &
<b>SZUTEST</b>	GC - \$\$\$%
<b>CE</b>	

<b>2000/14/EC</b>	&\$\$\$#( #
	z) \$ z'z' D:

	kw	kw	Amp
400/230	825,00	660,00	1084,00

	kw	kw	Amp
	825,00	660,00	1084,00

### Standard Specifications

- Heavy duty, water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket water heater
- Steel base frame and anti-vibration isolators
- Fuel tank under the base frame
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation

TRANSFER SWITCH

# APD 825 M

Mitsubishi


D+' &'



Manufacturer		Mitsubishi
Model		S6R2-PTAA
		% \$\$' "# "
		710,00 kw [951,00HP]
	L	29,960
	"	170X220
		14:1
	fl # ı	"# " 1500
	fl ı	L 94,00
		L 132,00
AbsorbedAirDischargeReSourceKey.Text	' # "	60,00
	' # "	726,00
		24 V d.c.
	Load	% \$\$ı
	# "	
		156,70

		ECO40VL/4
	Hz	50
	"	800,00
7 cg'		0,80
		3
	fl ı	400/230

		fl ı		fl ı	
	"	"	"	"	L
APD 825 M	6360,00	4100,00	1800,00	2200,00	1300,00
		fl ı		fl ı	
	"	"	"	"	L
MS 86	7680	5350	1800	2530	1300

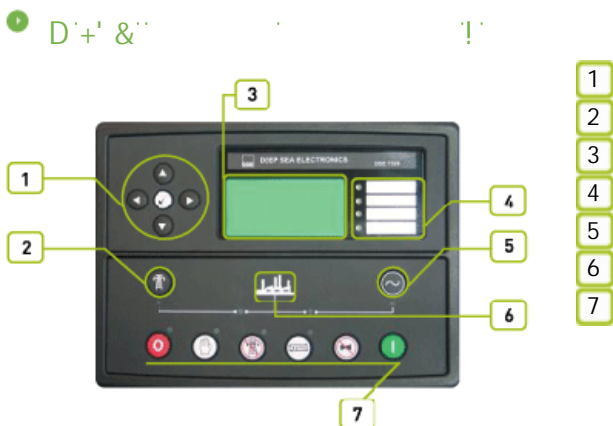

**APD 825 M**

Mitsubishi

D+' &'




- 1. '8G9ž '+' &\$ž )5ž&&\$#&(\$
- 2. "
- 3. ! "
- 4. '8G9+' &\$ ž fi  
&&\$ ž '8G9+' &\$  
'8G9+' &\$  
ž "
- 5. % &I'\*(  
žFG&' &žFG(,)ž



# APD 825 M

Mitsubishi

D+ & "

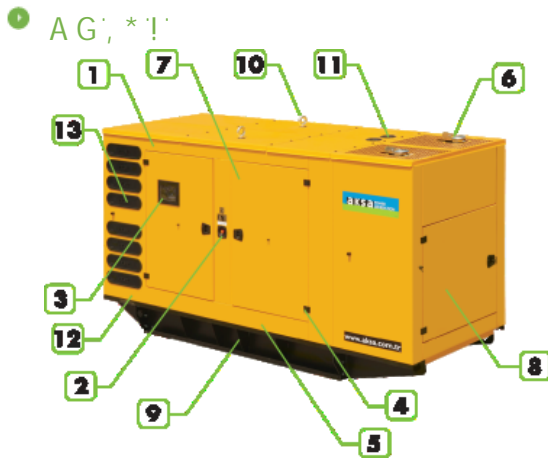

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1800
fl "L	"	5350
fl "L	"	2530
	L	1300