

APD 880 M

Mitsubishi

D+ &



ISO8528

GC ,) &

SZUTEST

GC - \$\$\$%



2000/14/EC

&\$\$\$#(#

z) \$ z'z' D:

| | " | kw | " | kw | Amp |
|---------|--------|--------|--------|--------|---------|
| 400/230 | 880,00 | 704,00 | 800,00 | 640,00 | 1156,00 |

fP GDE

GC ,) &

,) & z

fDF DE

%\$!

%

%&

GC " \$(*"

z&(

GC

Standard Specifications

- Heavy duty, water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket water heater
- Steel base frame and anti-vibration isolators
- Fuel tank under the base frame
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation

TRANSFER SWITCH

APD 880 M

Mitsubishi


D+' &'



| | | |
|--------------------------------------|--------|--------------------------|
| Manufacturer | | Mitsubishi |
| Model | | S12A2-PTA |
| | | % \$\$' "# " |
| | | 746,00 kw [1000,00HP] |
| | L | 33,930 |
| | " | 150X160 |
| | | 14,5:1 |
| | fl # ı | "# " 1500 |
| | fl ı | L 120,00 |
| | | L 220,00 |
| AbsorbedAirDischargeReSourceKey.Text | ' # " | 64,00 |
| | ' # " | 1140,00 |
| | | 24 V d.c. |
| | Load | % \$\$ı |
| | # " | 171,00 |

| | | |
|-------|------|-------------|
| | | ECO43-1SN/4 |
| | Hz | 50 |
| | " | 800,00 |
| 7 cg' | | 0,80 |
| | | 3 |
| | fl ı | 400/230 |

| | | | | | |
|-----------|---------|---------|---------|---------|--------|
| | | fl ı | | fl ı | |
| | " | " | " | " | L |
| APD 880 M | 6965,00 | 4370,00 | 1972,00 | 2222,00 | 850,00 |
| | | fl ı | | fl ı | |
| | " | " | " | " | L |
| AK 90 | 10115 | 6500 | 2200 | 2353 | 850 |

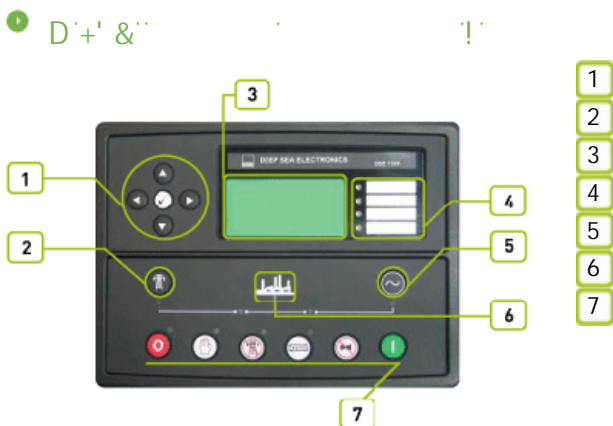

APD 880 M

Mitsubishi

D+ & "



f@#@BŁ
f@#@@Ł

" " "
" " " " "

f@#@BŁ

971

#

#

#

#

#

6G 9B * \$ -) \$

6G 9B * % \$ \$! * ! &

6G 9B * % \$ \$! * ! (

f&) + Ł

f&) (, Ł

f& % \$ Ł

GA 8

! & + " " "

% , ! & * (

)
& (\$)

ž


ž

ž

APD 880 M

Mitsubishi

D+ & "

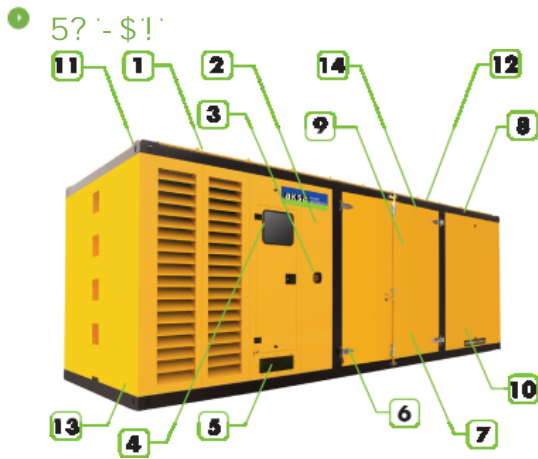

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the right side of the generator set
- 5 Cable cut locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors (marine type) for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

| | | |
|-------|---|------|
| | " | 2200 |
| fl "L | " | 6500 |
| fl "L | " | 2353 |
| | L | 850 |