

# AD 825

Doosan  
Mecc Alte  
D+ &



ISO8528

GC , ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	825,00	660,00	750,00	600,00	1083,00

fP GDE

GC , ) &

, ) & z

fDF DE

%\$!

%

%&

GC " \$(\*"

z&(

GC

## Standard Specifications

z

fl

E

z

z

## ALTERNATOR

D; A Z' 5J F

## TRANSFER SWITCH

# AD 825

Doosan  
Mecc Alte  
D+' &'

Manufacturer	Doosan		
Model	DP222LC		
		%\$\$' "# "	
		+&' \$\$\$' "	
		G* - \$\$\$<DQ	
	L	21,927	
	"	128 x 142	
		15,0:1	
	fl # ı	"# "	1500
	fl ı	L	40,00
		L	134,80
AbsorbedAirDischargeReSourceKey.Text	' # "	45,00	
	' # "	860,00	
	' # "	108,00	
	° C	502,00	
		24 V d.c.	
	Load	%\$\$ı	'+)ı
		)\$ı	
	# "	161,00	119,10 79,30


		Mecc Alte
		ECO 40-VL/4
	Hz	50
	"	750,00
7cg'		0,80
		3
	fl ı	400/230
	A	1083,00

		fl ı		fl ı	
	"	"	"	"	L
AD 825		3630,00	1550,00	2301,00	1000,00
		fl ı		fl ı	
	"	"	"	"	L
MS 85	5535	5297	1606	2656	1000

# AD 825

Doosan  
Mecc Alte  
D+' &''

## 1 D+' &''

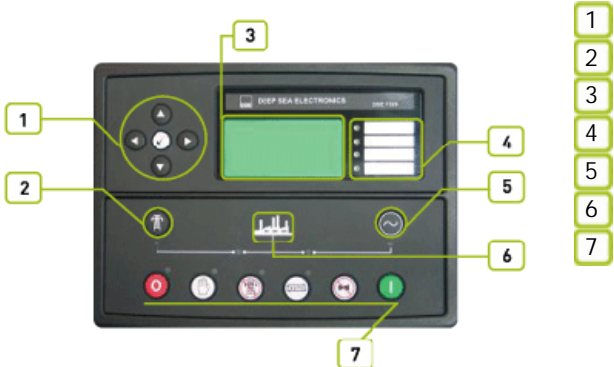

## 2

"8G9ž '+' &\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

"8G9+' &\$ž &&\$' ž " "8G9+' &\$ž "8G9+' &\$ž " " % &1 \*(' " žFG&' &žFG(,) ž " ž

# AD 825

Doosan  
Mecc Alte  
D+' &''

f@z@Bl  
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'\*\$-\$)'\$

6G'9B'\*\$\$\$!\*!&

6G'9B'\*\$\$\$!\*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&\*(

&(\$)


ž

ž

ž

# AD 825

Doosan  
Mecc Alte  
D+ &

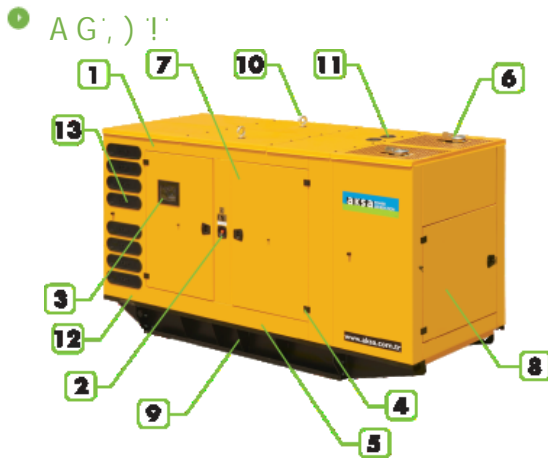

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000