

AD 750

Doosan
Mecc Alte
D+' &''

Manufacturer	Doosan		
Model	DP222LB		
		%\$\$' "# "	
		664,00 kw [890,00HP]	
	L	21,927	
	"	128 x 142	
		15,0:1	
	fl # ı	"# "	1500
	fl ı	L	40,00
		L	134,80
AbsorbedAirDischargeReSourceKey.Text	' # "	42,20	
	' # "	860,00	
	' # "	101,00	
	° C	481,00	
		24 V d.c.	
	Load	%\$\$ı	'+)ı
	# ")\$ı	
		147,10	109,20 73,00


	Mecc Alte		
	ECO 40-2L/4		
	Hz	50	
	"	680,00	
7cg'		0,80	
		3	
	fl ı	400/230	
	A	982,00	

		fl ı		fl ı	
	"	"	"	"	L
AD 750	4190,00	3494,00	1550,00	2301,00	1000,00
		fl ı		fl ı	
	"	"	"	"	L
MS 85	5400	5297	1606	2656	1000

AD 750

Doosan
Mecc Alte
D+' &'

1 D+' &'

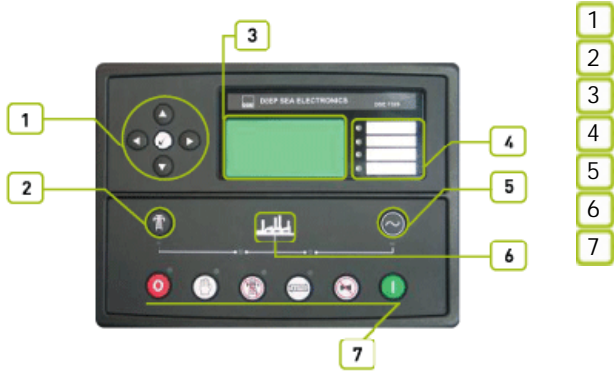

2

"8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

'8G9+' &\$' &&\$' ž

"'8G9+' &\$' '8G9+' &\$'

ž

% &1 *('

žFG&' &žFG(,) ž

ž

AD 750

Doosan
Mecc Alte
D+ &



f@#@Bt
f@#@Bt

"z" "z"

f@#@Bt

971

#

#

#

#



f&)+t

f&)(, t

f&)% \$t

6G'9B '*\$-) \$

6G'9B '*\$\$\$!*!&

6G'9B '*\$\$\$!*!(

#



z

%, !&*(

z
&(\$)

z

z


GA 8

!&+""

z

AD 750

Doosan
Mecc Alte
D+' &'

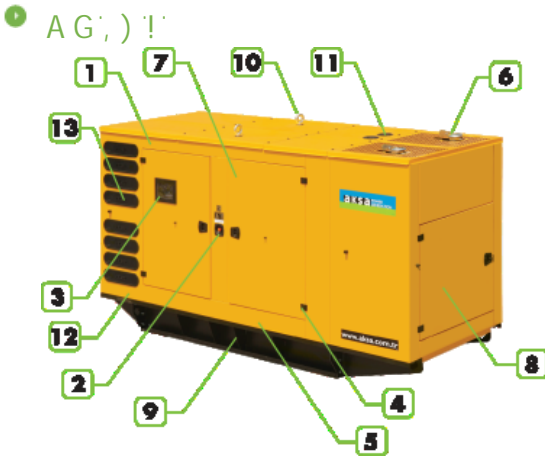

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000