


AD 630

Doosan
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	630,00	504,00	575,00	460,00	830,00

fP GDE

GC,) &

,) & z

fDF DE

%\$1

% %&

GC" \$(*"

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D; A Z' 5J F

TRANSFER SWITCH

AD 630

Doosan
Mecc Alte
D+' &''

Manufacturer		Doosan		
Model		DP180LA		
		%\$\$' "# "		
		552,00 kw [740,00HP]		
	L	18,273		
	"	128 x 142		
		15,0:1		
	fl # ı	"# "	1500	
	fl ı	L	34,00	
		L	112,20	
AbsorbedAirDischargeReSourceKey.Text	' # "	' # "	33,20	
		' # "	700,00	
		' # "	106,00	
	° C	° C	562,00	
			24 V d.c.	
	Load	%\$\$ı	ıııı) \$ı
	# "	# "	# "	# "
		123,60	94,00	64,80


		Mecc Alte		
		ECO 40-1,5L/4		
	Hz	Hz	50	
		"	620,00	
7cg'			0,80	
			3	
	ıııı		400/230	
	A	A	894,90	

		ıııı		ıııı	
		"	"	"	L
AD 630		3264,00	1550,00	2056,00	850,00
		ıııı		ıııı	
		"	"	"	L
MS 80	4835	4810	1606	2615	850

AD 630

Doosan
Mecc Alte
D+' &'

1 D+' &'

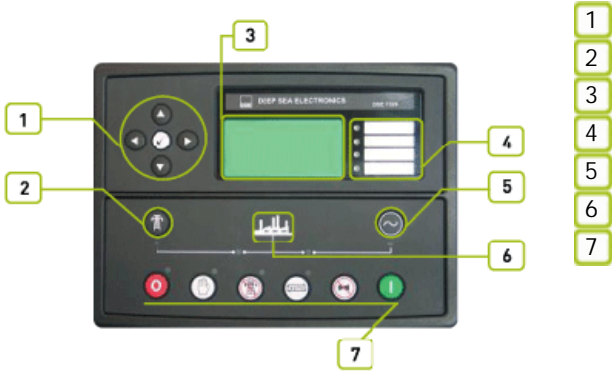

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž
&&\$ž ž

8G9+' &\$ž

8G9+' &\$ž

% &1 * (

žFG' &žFG(,) ž

"Новая энергия"

AD 630

Doosan
Mecc Alte
D+ &

f@#@Bt
f@#@Bt

"z" "z"

f@#@Bt

971

f&%) +L

f&)(, t

f&%) \$L

ž

"% !&*(

&(\$)

ž

ž

GA 8


!&+""

ž

"Новая энергия"

AD 630

Doosan
Mecc Alte
D+ &

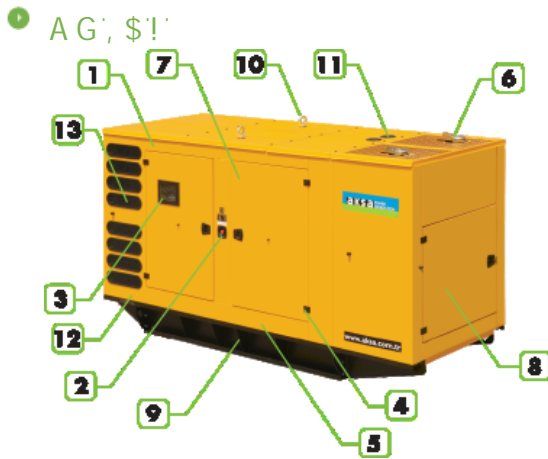

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

ООО "Новая энергия"

	"	1606
fl "L	"	4810
fl "L	"	2615
	L	850