

# AVP 415

Volvo Penta  
Mecc Alte  
D+ &



<b>ISO8528</b>	GC, ) &
<b>SZUTEST</b>	GC - \$\$\$%
<b>CE</b>	

2000/14/EC & \$\$\$#( #  
z) \$ z' z' D:

	kw	Amp
400/230	415,00	548,49
	332,00	
	380,00	
	304,00	

fP GDE GC, ) &  
fDF DE % \$! % % & GC " \$(\* z & GC

**Standard Specifications**

z  
fi ! E  
z  
z

**ALTERNATOR**

D: A Z 5J F  
f) \$\$\$ \$\$\$  
fi " ! " \$ E

**TRANSFER SWITCH**

!

# AVP 415

Volvo Penta  
Mecc Alte  
D+' &'




Manufacturer		Volvo Penta
Model		TAD1343GE
		366,00 kw [498,00HP]
	L	12,780
	"	131X158
		18,1:1
	"# "	1500
	L	36,00
	L	44,00
AbsorbedAirDischargeReSourceKey.Text	' # "	27,00
	' # "	420,00
		24 V d.c.
	Load	%\$ \$i
	# "	83,50

		Mecc Alte
		ECO40 1S/4
	Hz	50
	"	400,00
7cg'		0,80
		3
	fl 7	400/230
	A	577,00

		fl 7		fl 7	
AVP 415		3138,00	1550,00	1855,00	L 700,00
		fl 7		fl 7	
MS 70	4040	4460	1606	2477	L 700

D+' &'


!

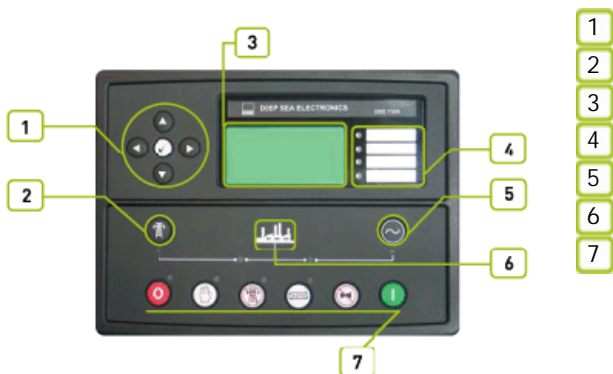




# AVP 415

Volvo Penta  
Mecc Alte  
D+ &

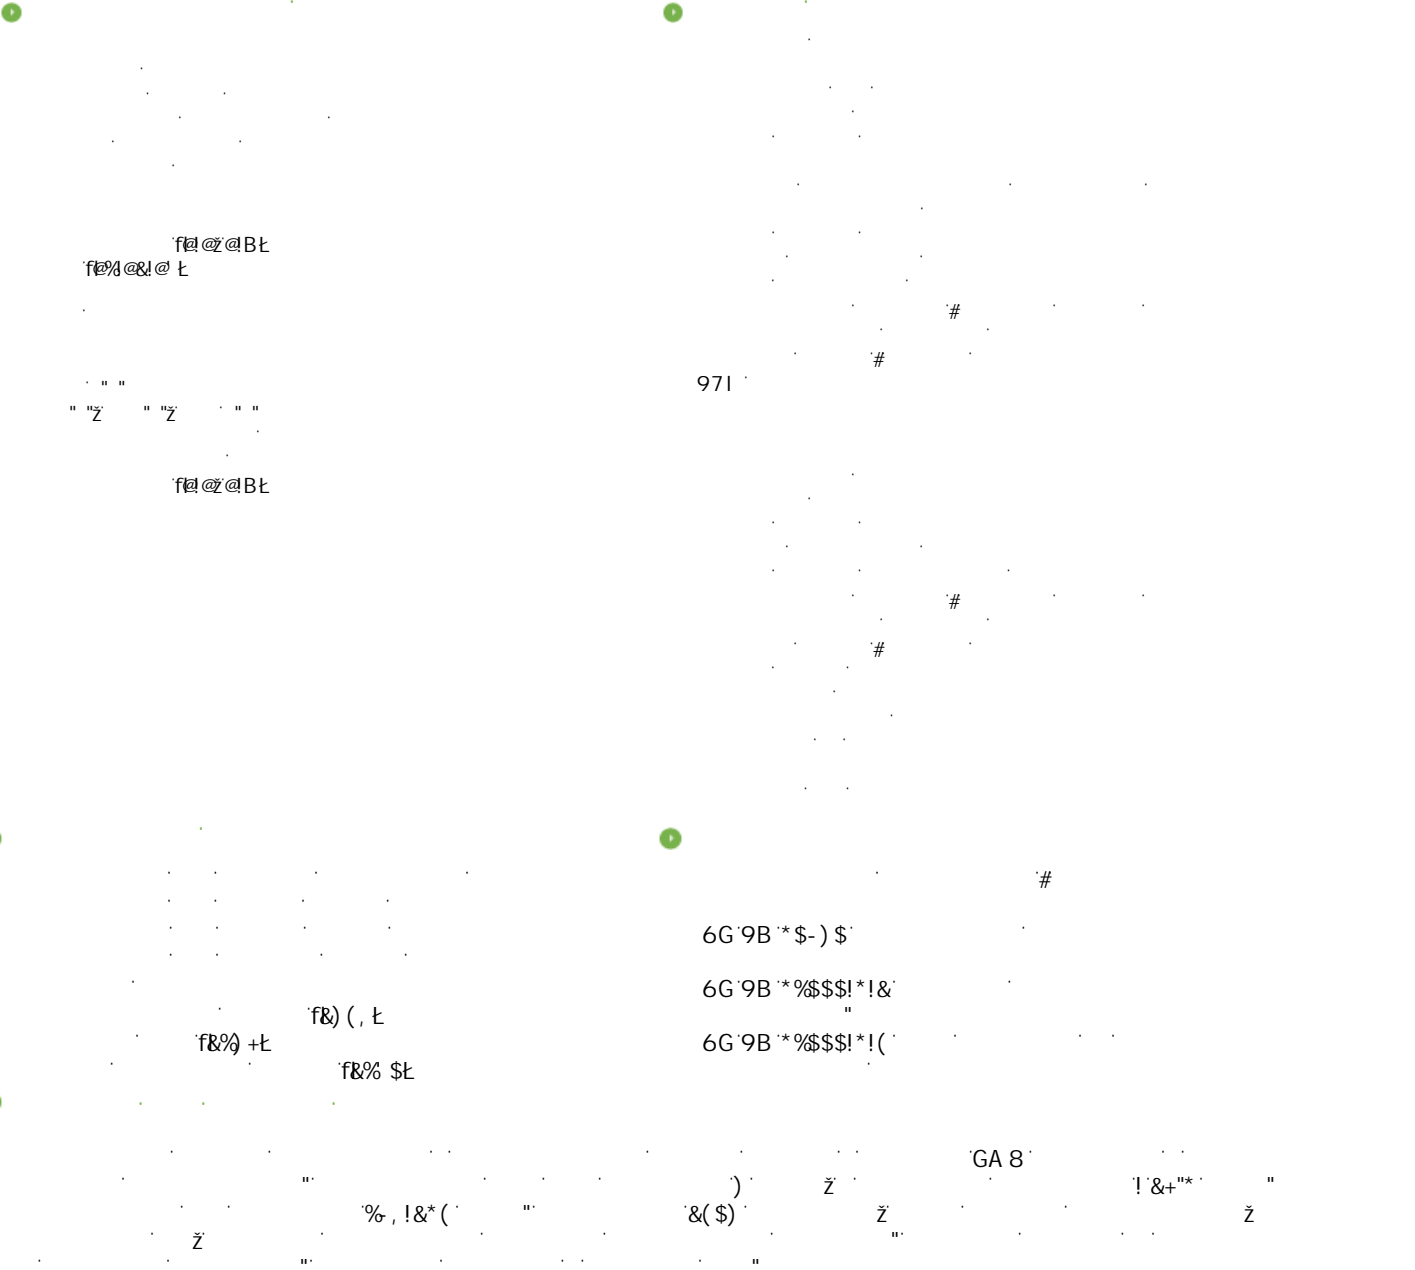

# AVP 415

Volvo Penta  
Mecc Alte  
D+ &

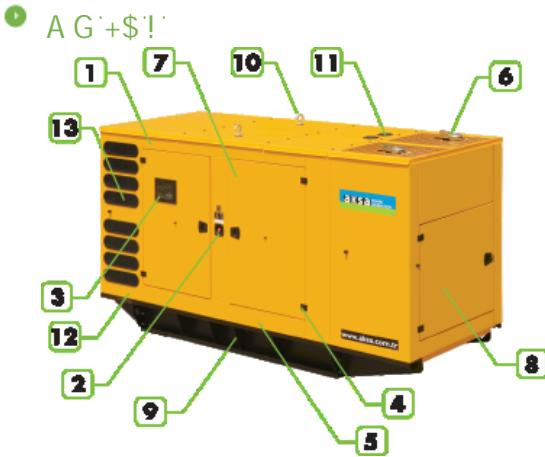

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4460
fl "L	"	2477
	L	700